

Engelmann Heat Meter

SensoStar Q

Mechanical flow sensor for inline installation points



Most accurate measurement results
Flexible communication based on modular system
Fast response due to dynamic temperature
measurement cycle

Precise heat/cooling measurement

The SensoStar Q is a high-precision measuring device that uses inductive sensing to record heat or cooling energy. This meter offers the right solution for every installation situation or requirement. The comprehensive range covers installation lengths, temperature sensor and communication variants.


We speak your language

The continuously growing portfolio of communication modules offers you a wide range of remote readout options.

RADIO MODULES



WIRED MODULES

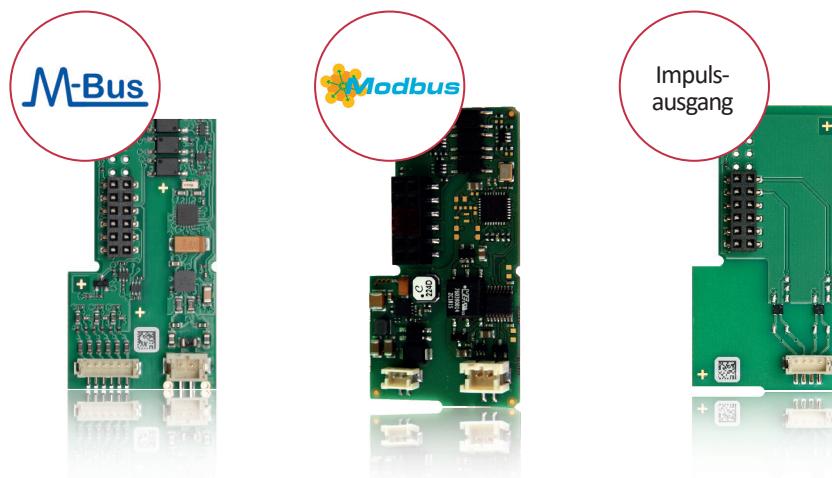

Features

- Sizes: from DN 15 to DN 20
- Meters from qp 0.6 to qp 2.5
- Installation lengths: 110 mm and 130 mm
- Horizontal / vertical / overhead installation
- Installation point and display unit adjustable on site
- Return flow detection
- Detachable calculator with 0.50 m connection cable
- Battery life of up to 20 years



wM-Bus, LoRaWAN and M-Bus can also be equipped with 3 pulse inputs to connect other devices.

SensoStar Q

TECHNICAL DATA



1. Flow sensor

Sizes	Nominal flow rate qp	m³/h	0.6	1.5	2.5
	Low flow threshold value	l/h	3.5	4.0	5.5
	Minimum flow qi	l/h	12	30	50
	Maximum flow qs	m³/h	1.2	3.0	5.0
Pressure drop Δp at qp	bar	0.1	0.2	0.24	
Pressure drop Δp at qs	bar	0.4	0.74	0.92	
Nominal diameter	mm	DN 15	DN15	DN20	
Connection thread	inch	G3/4B	G3/4B	G1B	
Installation length	mm	110	110	130	
Dynamic range qi/qp	-	1:50	1:50	1:50	
Measuring method	bidirectional inductive scanning system				
Accuracy class (MID)	Class 3				
Nominal pressure PN	bar	16			
Temperature range medium heat	°C	15 – 90			
Temperature range medium cooling (qp 1.5 and qp 2.5)	°C	5 – 50			
Point of installation	outlet flow and inlet flow; can be set when the amount of energy is still ≤ 10 kWh				
Mounting position	any position (horizontal, vertical, overhead)				
Protection class	IP65				
Medium	water; optional, without approval*: water with a propylene glycol or ethylene glycol percentage rate of 20 %, 30 %, 40 % or 50 % (* type and concentration of glycol can be set at any time)				

2. Calculator

Temperature range medium	°C	0 – 150 heat / 0 – 50 cooling (qp 1.5 and qp 2.5)
Ambient temperature in the field	°C	5 – 55 at 95 % relative humidity
Transport temperature	°C	-25 – 70 (for max. 168 h)
Storage temperature	°C	-25 – 55
Temperature difference range Δθ heat	K	3 – 100
Temperature difference range Δθ cooling	K	-3 – -50
Minimum temperature difference Δθ heat	K	> 0.05
Minimum temperature difference Δθ cooling	K	<-0.05
Minimum temperature difference Δθ heat / cooling	K	> 0.5 / <-0.5
Resolution temperature	°C	0.01
Measuring cycle temperature; dynamic	s	2 / 60; using a power pack: 2 s permanent

SensoStar Q

TECHNICAL DATA

Display	LCD – 8 digits + special characters
Displayed thermal energy	up to 3 decimal places
Units	MWh, kW, m ³ , m ³ /h (kWh, GJ, MMBTU, Gcal); unit of energy can be set when the amount of energy is still ≤ 10 kWh
Interfaces	optical interface (M-Bus protocol); <i>optional communication:</i> radio: wireless M-Bus*, LoRaWAN*; wired: M-Bus*, Modbus, 2 pulse outputs
Power supply	easily replaceable 3 V lithium battery; preparation for 3 V power pack available (input voltage 230 V / 24 V)
Estimated lifetime years	20 without communication module; 16 with M-bus hourly readout; 15 with M-Bus 10 minute readout; 10 with others e.g. wM-bus, Modbus, LoraWAN
Data storage	24 monthly and semi-monthly values
Billing dates	freely selectable annual reference date; 15 monthly and semi-monthly values via display or radio (compact mode); 24 monthly and semi-monthly values via optical interface or M-Bus
2 tariff registers	individually adjustable; store energy or time
Storage of the maximum values	flow, power and temperatures (inlet, outlet, ΔΘ) as well as the respective maximum values of the last 15 months
Protection class	IP65
CE	yes
EMC	EN 1434

* Optional with 3 pulse inputs.

3. Temperature sensors (2-wire technology)

Platinum precision resistor	Pt 1000
Sensor diameter	mm UTS: 5; 5.2; 6; AGFW: 27.5; 38; needle sensor: 3.5 x 75
Connection cable length	m 1.5; 3; 6
Installation type	asymmetrical; symmetrical


4. Weights

Weight (standard version in kg)	qp 0.6 / qp 1,5	qp 2.5
Calculator not detachable	0.875	0.955
Calculator detachable	0.915	0.995

5. Dimensions


Pulse cable length (only separable version)	m	0.50
Calculator housing (H x W x D)	mm	75 x 110 x 34.5
External thread	qp 0.6 / qp 1.5: G3/4“, DN 15	qp 2.5: G1“, DN 20

TECHNICAL DATA

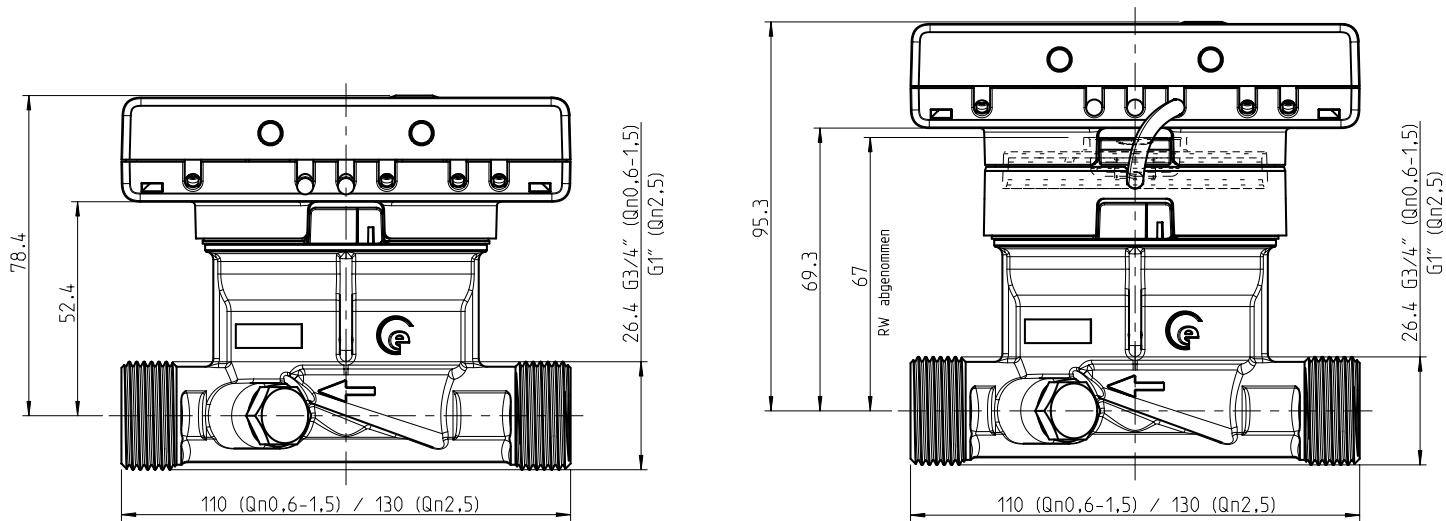

PRESSURE DROP SENSOSTAR Q

Pressure drop [mbar]

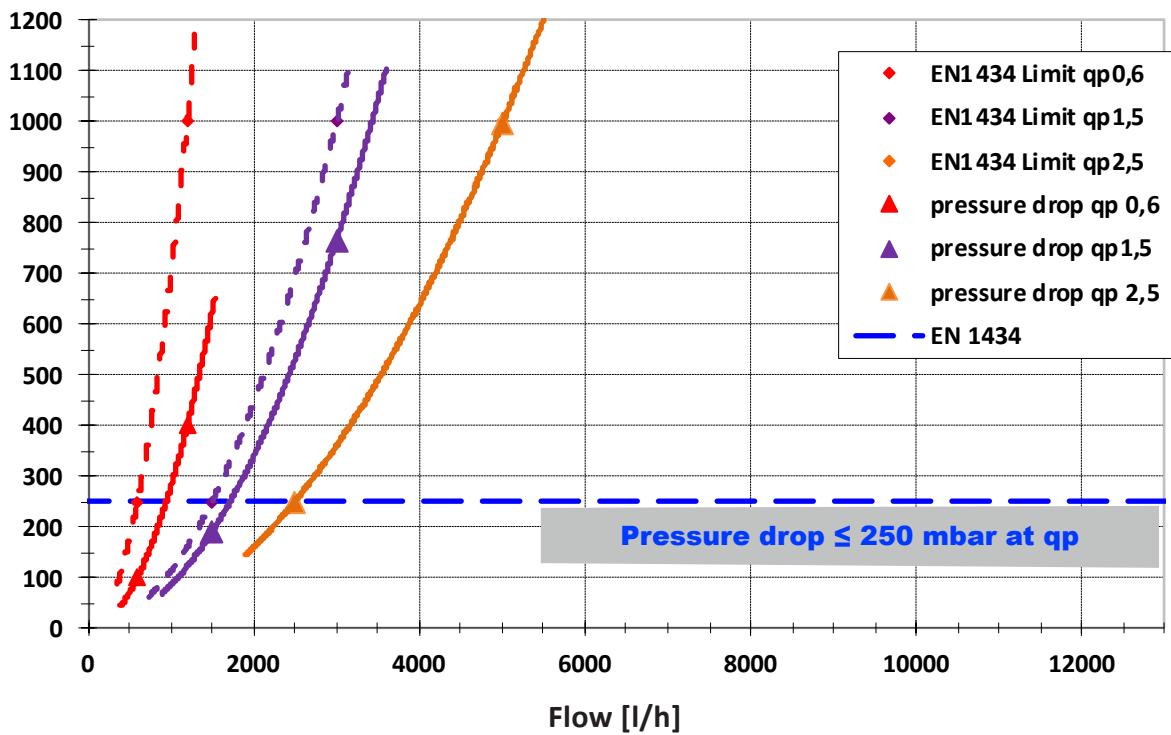

Contact us here:



+49 6222 98 00 188 (Orders)

+49 6222 98 00 2727 (Technical Service)

+49 6222 98 00 0 (Head Office)



info@engelmann.de



Engelmann Sensor GmbH

Rudolf-Diesel-Straße 24-28

69168 Wiesloch-Baiertal

Germany



www.engelmann.de