


Engelmann Heat Meter

SensoStar A

Mechanical flow sensor for installation points A1

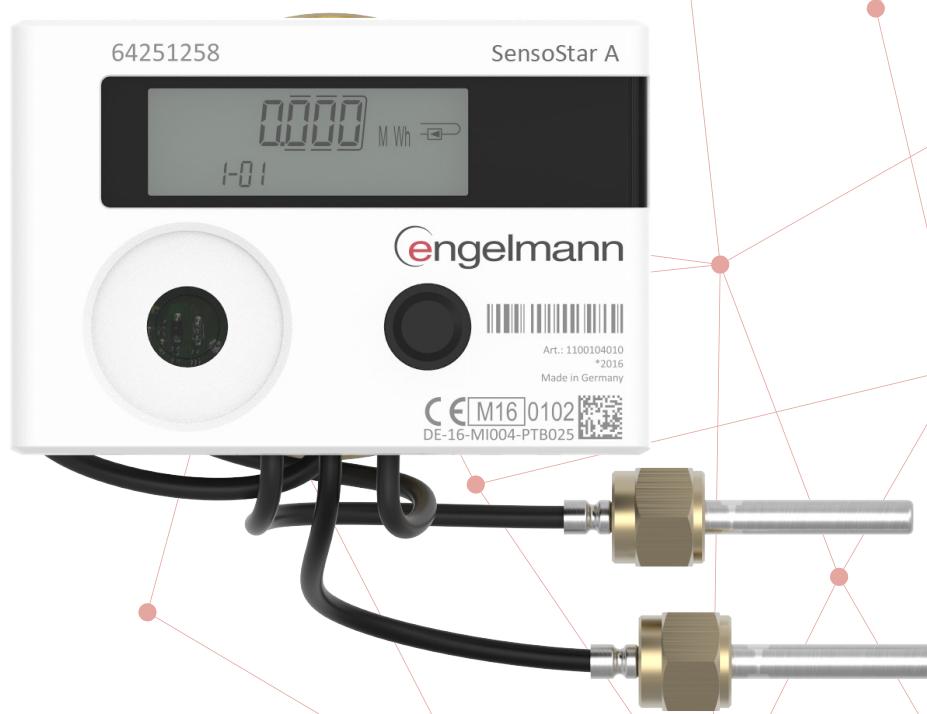

Most accurate measurement results in any mounting position
Flexible communication based on modular system
Fast response due to dynamic temperature measurement cycle

Precise heat/cooling measurement

The **SensoStar A** is a high-precision measuring device that uses inductive sensing to record heat or cooling energy. The comprehensive range covers a large number of temperature sensor and communication variants.


We speak your language

The continuously growing portfolio of communication modules offers you a wide range of remote readout options.

RADIO MODULES



WIRED MODULES

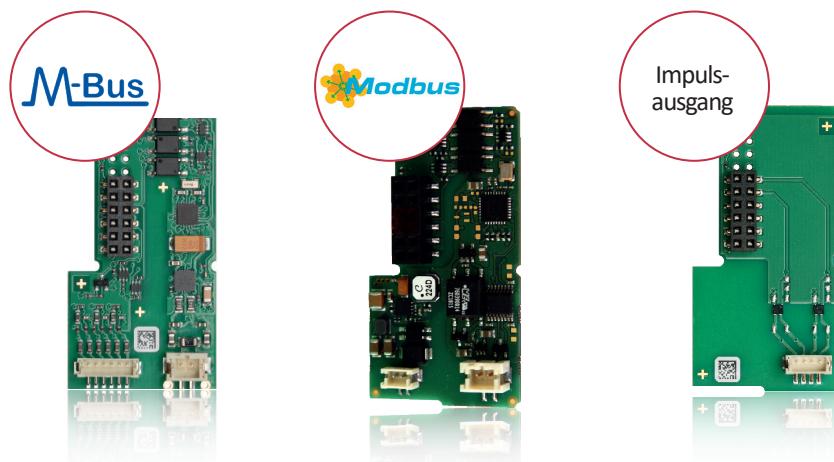

Features

- Meters from Qp 0.6 to Qp 2.5
- Installation points: A1
- Horizontal / vertical / overhead installation
- Installation point and display unit adjustable on site
- Return flow detection
- Detachable calculator with 0.50 m connection cable
- Battery life of up to 20 years



wM-Bus, LoRaWAN and M-Bus can also be equipped with 3 pulse inputs to connect other devices.

SensoStar A

TECHNICAL DATA



Flow sensor

Sizes	Nominal flow rate Qp	m³/h	0.6	1.5	2.5
	Low flow threshold value	l/h	3.5	4	5.5
	Minimum flow Qi	l/h	12	30	50
	Maximum flow Qs	m³/h	1.2	3	5
Pressure drop Δp at Qp	bar	0.1	0.2	0.24	
Pressure drop Δp at Qs	bar	0.4	0.74	0.92	
Dynamic range Qi/Qp	-	1:50	1:50	1:50	
Measuring method		bidirectional inductive scanning system			
Accuracy class (MID)		Class 3			
Protection class		IP65			
Nominal pressure PN	bar	16			
Medium		water; optional, without approval: water with a propylene glycol or ethylene glycol percentage rate of 20 %, 30 %, 40 % or 50 % (type and concentration of glycol can be set at any time)			
Mounting position		any position (horizontal, vertical, overhead)			
Point of installation		outlet flow and inlet flow; can be set when the amount of energy is still ≤ 10 kWh			
Temperature range medium heat	°C	15 – 90			
Temperature range medium cooling (from Qp 1.5 to Qp 2.5)	°C	5 – 50			

Calculator

Temperature range medium	°C	0 – 150 heat / 0 – 50 cooling (from Qp 1.5 to Qp 2.5)
Ambient temperature in the field	°C	5 – 55 at 95 % relative humidity
Transport temperature	°C	-25 – 70 (for max. 168 h)
Storage temperature	°C	-25 – 55
Temperature difference range ΔΘ heat	K	3 – 100
Temperature difference range ΔΘ cooling	K	-3 – -50
Minimum temperature difference ΔΘ heat	K	> 0.05
Minimum temperature difference ΔΘ cooling	K	<-0.05
Minimum temperature difference ΔΘ heat / cooling	K	> 0.5 / <-0.5
Resolution temperature	°C	0.01
Measuring cycle temperature; dynamic	s	2 / 60; using a power pack: 2 s permanent
Display		LCD – 8 digits + special characters
Displayed thermal energy		up to 3 decimal places

SensoStar A

TECHNICAL DATA

Units	MWh, kW, m ³ , m ³ /h (kWh, GJ, MMBTU, Gcal); unit of energy can be set when the amount of energy is still ≤ 10 kWh
Interfaces	optical interface (M-Bus protocol); <i>optional communication:</i> radio: wireless M-Bus*, LoRaWAN*; wired: M-Bus*, Modbus, 2 pulse outputs
Power supply	easily replaceable 3 V lithium battery; preparation for 3 V power pack available (input voltage 230 V / 24 V)
Estimated lifetime	years 20 without communication module; 16 with M-bus hourly readout; 15 with M-Bus 10 minute readout; 10 with others e.g. wM-bus, Modbus, LoraWAN
Data storage	24 monthly and semi-monthly values
Billing dates	freely selectable annual billing date; 15 monthly and semi-monthly values via display or radio (compact mode); 24 monthly and semi-monthly values via optical interface or M-Bus
2 tariff registers	individually adjustable; store energy or time
Storage of the maximum values	flow, power and temperatures (inlet, outlet, ΔΘ) as well as the respective maximum values of the last 15 months
Protection class	IP65
Approvals	DE-16-MI004-PTB025; DE-16-M-PTB-0097; CH-T2-18768-00; CE
EMC (MID)	EN 1434

* Optional with 3 pulse inputs.

Temperature sensors (2-wire technology)

Platinum precision resistor	Pt 1000	
Sensor diameter	mm	UTS: 5; 5.2; 6; AGFW: 27.5; 38; needle sensor: 3.5 x 75
Connection cable length	m	1.5; 3; 6
Installation type	asymmetrical; symmetrical	

Weight


Weight (standard version in kg)	0.955
----------------------------------------	-------

Dimensions


Pulse cable length (only separable version)	m	0.50
Calculator housing (H x W x D)	mm	75 x 110 x 34.5
Connection thread		M 77 x 1.5

TECHNICAL DATA

SensoStar3
MSH AStar / kompakt

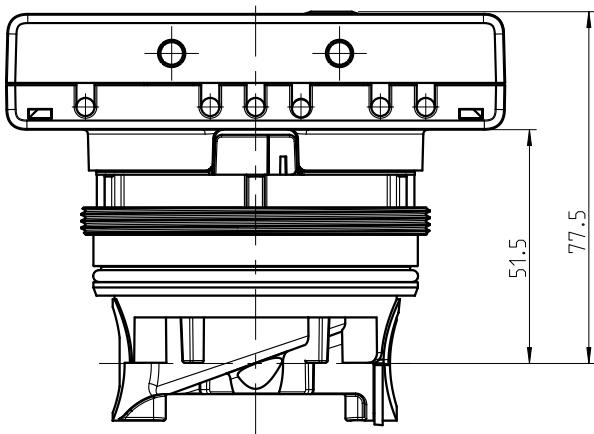


SensoStar3
MSH AStar / splitt

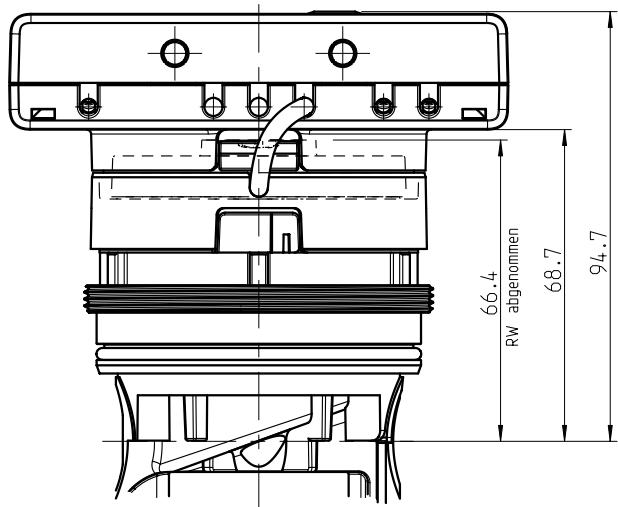

PRESSURE DROP SENOSTAR A

Pressure drop [mbar]

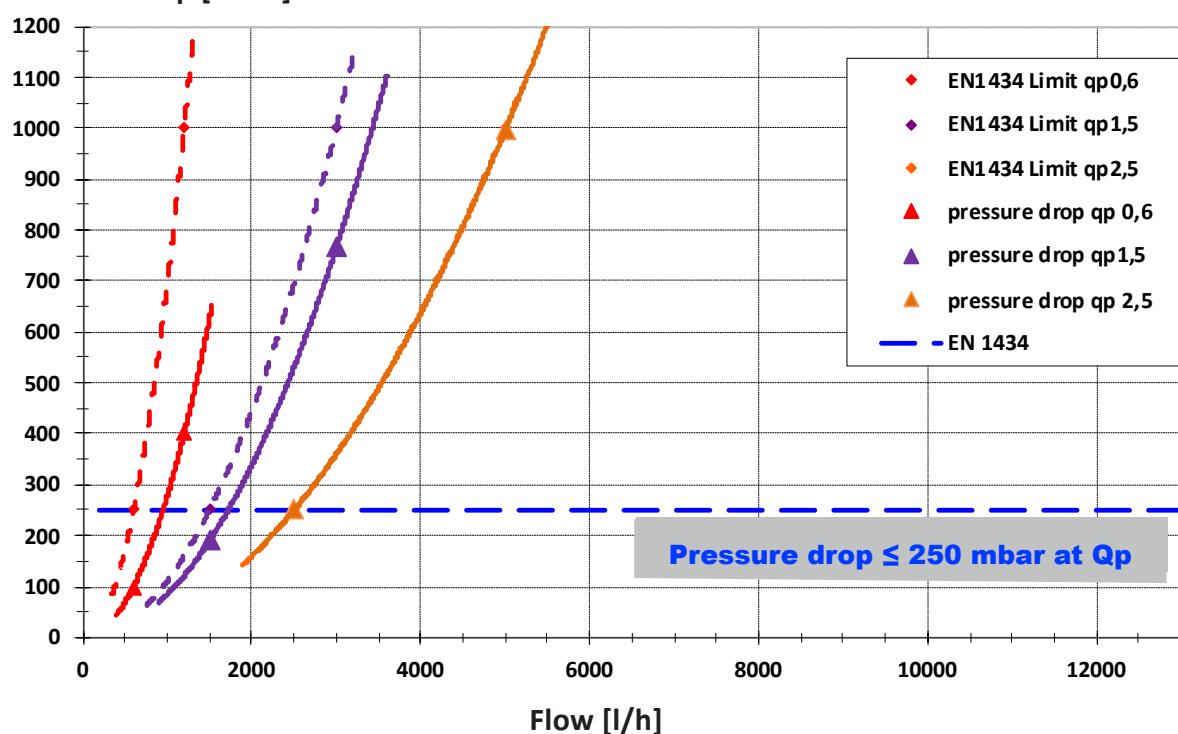

Contact us here:



+49 6222 98 00 188 (Orders)

+49 6222 98 00 2727 (Technical Service)

+49 6222 98 00 0 (Head Office)



info@engelmann.de



Engelmann Sensor GmbH

Rudolf-Diesel-Straße 24-28

69168 Wiesloch-Baiertal

Germany



www.engelmann.de