


Engelmann Heat Meter

# SensoStar E

Mechanical flow sensor for inline installation points

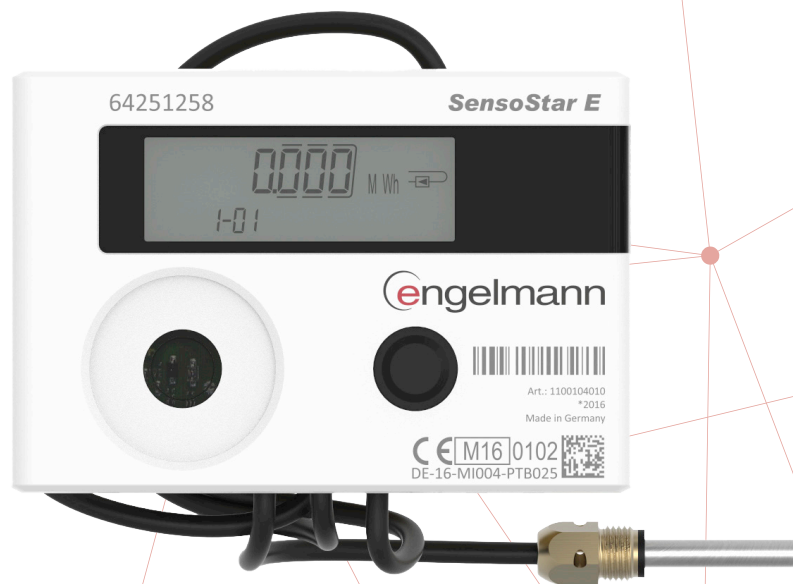

Most accurate measurement results using the single-jet principle

Various installation options due to a large selection of interfaces and options

Flexible communication based on modular system

Fast response due to dynamic temperature measurement cycle



## Precise heat/cooling measurement

The **SensoStar E** is a high-precision measuring device that uses inductive sensing to record heat or cooling energy. This meter offers the right solution for every installation situation or requirement. The comprehensive range covers all installation lengths, temperature sensor and communication variants.

### We speak your language

The continuously growing portfolio of communication modules offers you a wide range of remote readout options.





#### RADIO MODULES



#### Features

- Meters from Qp 0.6 to Qp 2.5
- Sizes: DN 15 and DN 20
- Installation lengths: 110 mm and 130 mm
- Vertical or horizontal installation
- Installation point and display unit adjustable on site
- Automatic return flow detection
- Detachable calculator with 0.50 m connection cable
- Battery capacity of up to 20 years

#### WIRED MODULES



wM-Bus, LoRaWAN and M-Bus can also be equipped with 3 pulse inputs to connect other devices.

Flow sensor						
Sizes	Nominal flow rate $Q_p$	m <sup>3</sup> /h	0.6	1.5	1.5	2.5
	Low flow threshold value	horizontal	3.5 l/h	7 l/h	7 l/h	10 l/h
		vertical	4 l/h	7 l/h	7 l/h	10 l/h
	Minimum flow $Q_i$	l/h	24	60	60	100
	Maximum flow $Q_s$	m <sup>3</sup> /h	1.2	3	3	5
Pressure drop $\Delta p$ at $Q_p$	bar	0.155	0.210	0.225	0.165	
Pressure drop $\Delta p$ at $Q_s$	bar	0.660	0.840	0.910	0.675	
Nominal diameter	mm	DN 15	DN 15	DN 20	DN 20	
Connection thread	inch	G3/4B	G3/4B	G1B	G1B	
Installation length	mm	110	110	130	130	
Dynamic range $Q_i/Q_p$	-	1:25	1:25	1:25	1:25	
Measuring method	bidirectional inductive scanning system					
Accuracy class (MID)	class 3					
Nominal pressure $P_N$	bar	16				
Temperature range medium heat	°C	15 – 90				
Temperature range medium cooling ( $Q_p$ 1.5 (DN 15) and $Q_p$ 2.5)	°C	5 – 50				
Point of installation	outlet flow and inlet flow; can be set when the amount of energy is still $\leq$ 10 kWh					
Mounting position	horizontal/vertical					
Protection class	IP65					
Medium	water; optional, without approval: water with a propylene glycol or ethylene glycol percentage rate of 20 %, 30 %, 40 % or 50 % (type and concentration of glycol can be set at any time)					

Calculator		
Temperature range medium	°C	0 – 150 heat / 0 – 50 cooling ( $Q_p$ 1.5 (DN 15) and $Q_p$ 2.5)
Ambient temperature in the field	°C	5 – 55 at 95 % relative humidity
Transport temperature	°C	-25 – 70 (for max. 168 h)
Storage temperature	°C	-25 – 55
Temperature difference range $\Delta\theta$ heat	K	3 – 100
Temperature difference range $\Delta\theta$ cooling	K	-3 – -50
Minimum temperature difference $\Delta\theta$ heat	K	> 0.05
Minimum temperature difference $\Delta\theta$ cooling	K	< -0.05
Minimum temperature difference $\Delta\theta$ heat/cooling	K	> 0.5 / < -0.5
Resolution temperature	°C	0.01
Measuring cycle temperature; dynamic	s	2 / 60; using a power pack: 2 s permanent

# SensoStar E

## TECHNICAL DATA

<b>Display</b>	LCD – 8 digits + special characters	
<b>Displayed thermal energy</b>	up to 3 decimal places	
<b>Units</b>	MWh, kW, m <sup>3</sup> , m <sup>3</sup> /h (kWh, GJ, MMBTU, Gcal); unit of energy can be set when the amount of energy is still ≤ 10 kWh	
<b>Interfaces</b>	optical interface (M-Bus protocol); <i>optional communication:</i> radio: wireless M-Bus*, LoRaWAN*; wired: M-Bus*, Modbus, 2 pulse outputs	
<b>Power supply</b>	easily replaceable 3 V lithium battery; preparation for 3 V power pack available (input voltage 230 V / 24 V)	
<b>Battery capacity, designed</b>	years	20 (without communication module); 16 (M-Bus, readout interval 1 hour); 15 (M-Bus, readout interval 10 minutes); 10 (with others e.g. wM-Bus, Modbus, LoraWAN)
<b>Data storage</b>	24 monthly and semi-monthly values	
<b>Billing dates</b>	freely selectable annual billing date; 15 monthly and semi-monthly values via display or radio (compact mode); 24 monthly and semi-monthly values via optical interface or M-Bus	
<b>2 tariff registers</b>	individually adjustable; store energy or time	
<b>Storage of the maximum values</b>	flow, power and temperatures (inlet, outlet, ΔΘ) as well as the respective maximum values of the last 15 months	
<b>Protection class</b>	IP65	
<b>CE</b>	yes	
<b>EMC (MID)</b>	EN 1434	

\* Optional with 3 pulse inputs.

### Temperature sensors (2-wire technology)

<b>Platinum precision resistor</b>	Pt 1000	
<b>Sensor diameter</b>	mm	UTS: 5; 5.2; 6; AGFW: 27.5; 38; needle sensor: 3.5 x 75
<b>Connection cable length</b>	m	1.5; 3; 6
<b>Installation type</b>	asymmetrical; symmetrical	



### Weights

<b>Weight (standard version in kg)</b>	Qp 0.6 / Qp 1.5 (DN 15)	Qp 1.5 (DN 20) / Qp 2.5
<b>Calculator not detachable</b>	0.755	0.795
<b>Calculator detachable</b>	0.840	0.880

### Dimensions


<b>Pulse cable length (only separable version)</b>	m	0.50
<b>Calculator housing (H x W x D)</b>	mm	75 x 110 x 34.5
<b>Connection thread</b>	G3/4", DN 15: Qp 0.6 / Qp 1.5	G1", DN 20: Qp 1.5 / Qp 2.5

# TECHNICAL DATA

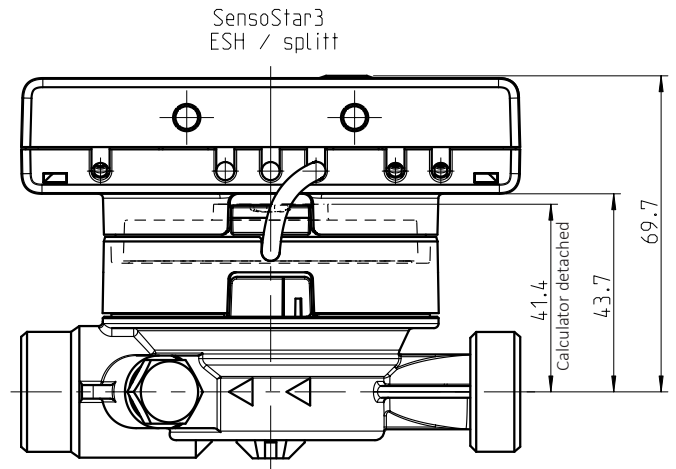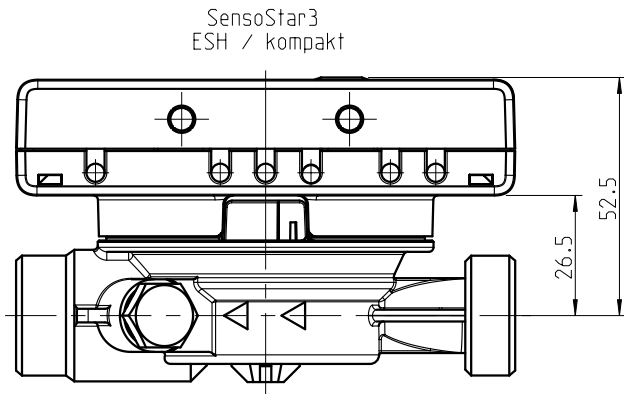

## PRESSURE DROP SENSOSTAR E

Pressure drop [mbar]

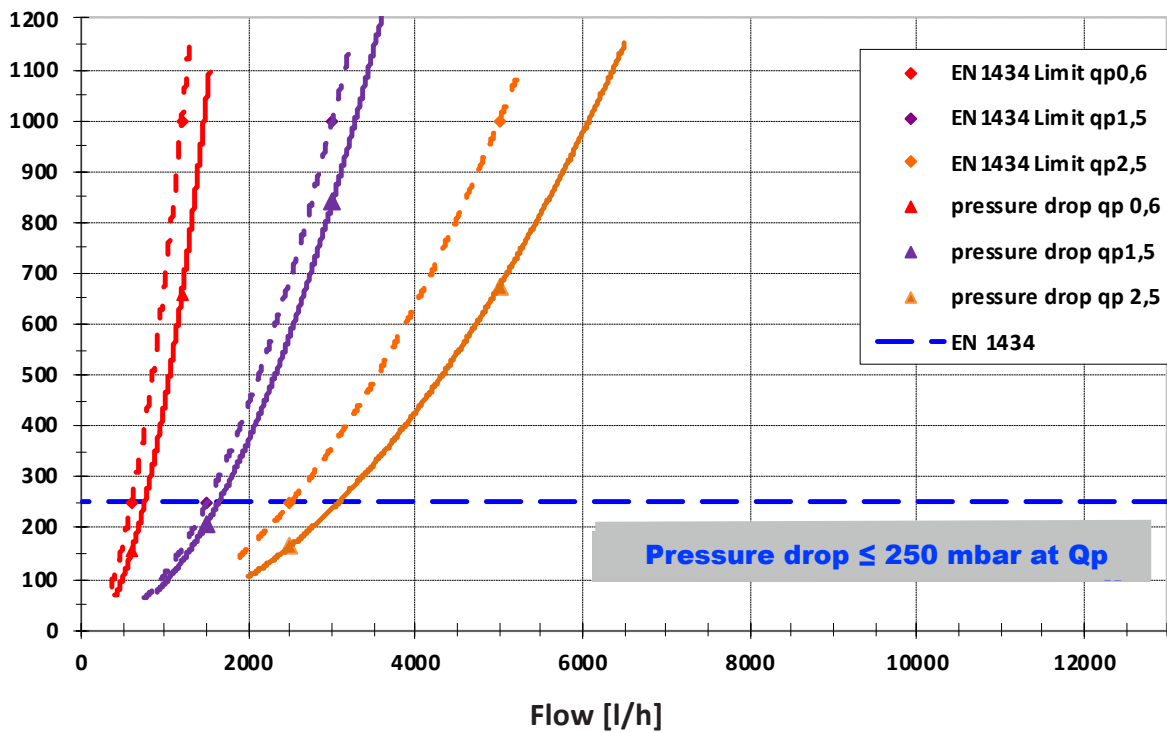

**Contact us here:**



+49 6222 98 00 188 (Orders)  
+49 6222 98 00 2727 (Technical Service)  
+49 6222 98 00 0 (Head Office)



[info@engelmann.de](mailto:info@engelmann.de)



Engelmann Sensor GmbH  
Rudolf-Diesel-Straße 24-28  
69168 Wiesloch-Baiertal  
Germany



[www.engelmann.de](http://www.engelmann.de)